



The magic life in the image world

# E-IMAGE

## CM-615 Professional Broadcasting Microphone



E-IMAGE CM-615 microphone is designed for broadcasting room and meeting room. It offers exceptionally clear and natural reproduction. Its rugged housing with special flannel lacquer and brass material stands up to field use.



20.0mm/0.8in



138mm/5.4in

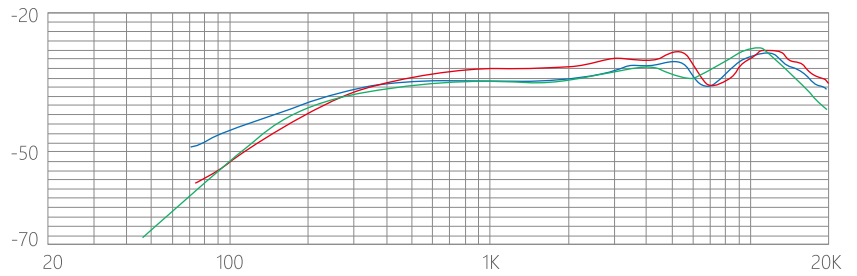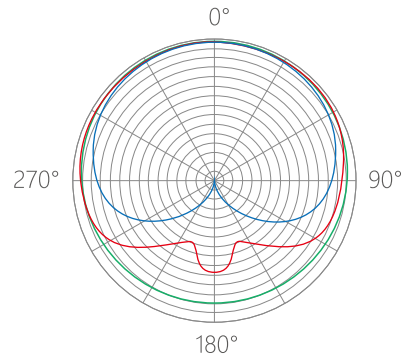

### WHAT'S INCLUDED



1



2



3



4

1	Carrying Bag	1pc
2	Foam Windshiled	1pc
3	CM-615 Microphone	1pc
4	Microphone Clip	1pc



## SPECIFICATIONS

Element	Back Electret Condenser
Polar Pattern	Cardioid/ Hyper-cardioid/ Omni
Frequency Response	40Hz-16KHz
Sensitivity (48V/1.5V)	-38dB±3dB(1dB=1V/Pa at 1KHz)
Output Impedance	600Ω ±20% (at 1KHz)
Equivalent Noise Level	≤25dBa
Signal to Noise Ratio	70dB (1KHz at 1Pa)
Max.Input SPL	130dB/115dB (T.H.D<1% at 1KHz)
Power Requirements	(48V DC)2mA
Line Length	3M
Size	∅20 x 138mm
Output Interface	XLRM

## FEATURES



**Cardioid**

The E-IMAGE CM-615 is ideal for use in broadcasting room and meeting room.



Interchangeable with hyper-cardioid and omni sound heads.

  
Hyper-cardioid


  
Omni



Straight intermediate and advanced high frequency make the sound clear.



Operates on 48V phantom power.



With broad balanced range of frequency response.

**40Hz-16kHz**  
Frequency response



Brass shell paint by special flannel lacquer, which makes the products beautiful.