



The magic life in the image world

# E-IMAGE

## CM-620 Professional Broadcasting Microphone

A mini microphone amplifier makes sound powerful from 4kHz to 20kHz.


48V phantom power used in indoor and out door.

With broad balanced range of frequency response.

The gold plated XLR link makes audio frequency current with ideal transmission.



20.0mm/0.8in

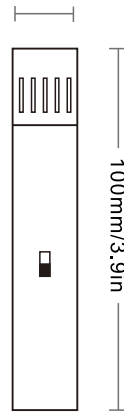

### WHAT'S INCLUDED



①



②



③



④

① Carrying Bag	1pc
② Foam Windshiled	1pc
③ CM-620 Microphone	1pc
④ Microphone Clip	1pc



## SPECIFICATIONS

Element	Back Electret Condenser
Polar Pattern	Hyper-cardioid
Frequency Response	30Hz-18KHz
Sensitivity (48V/1.5V)	-32dB
Output Impedance	600Ω ±20% (at 1KHz)
Equivalent Noise Level	≤25dBa
Signal to Noise Ratio	≥75dB
Max.Input SPL	130dB/115dB (T.H.D<1% at 1KHz)
Power Requirements	(48V DC)2mA
Line Length	3M
Size	Φ20 x 100mm
Output Interface	XLRM

## FEATURES

 <p><b>Hyper-cardioid</b></p> <p>The E-IMAGE CM-620 is ideal for use in broadcasting room and meeting room.</p>	 <p>Selectable low-cut filter minimizes unwanted noise and rumble.</p>	 <p>Straight intermediate and advanced high frequency make the sound clear.</p>
 <p>Operates on 48V phantom power.</p>	 <p>With broad balanced range of frequency response.</p> <div style="border: 1px solid black; padding: 2px; display: inline-block;"> <p><b>30Hz-18kHz</b> Frequency response</p> </div>	 <p>Brass shell paint by special flannel lacquer, which makes the products beautiful.</p>